

# HiREL CONNECTORS INC.




D38999/26

EMI/RFI Environment Resistant Plug

MIL-DTL-38999

Series III – Threaded Coupling

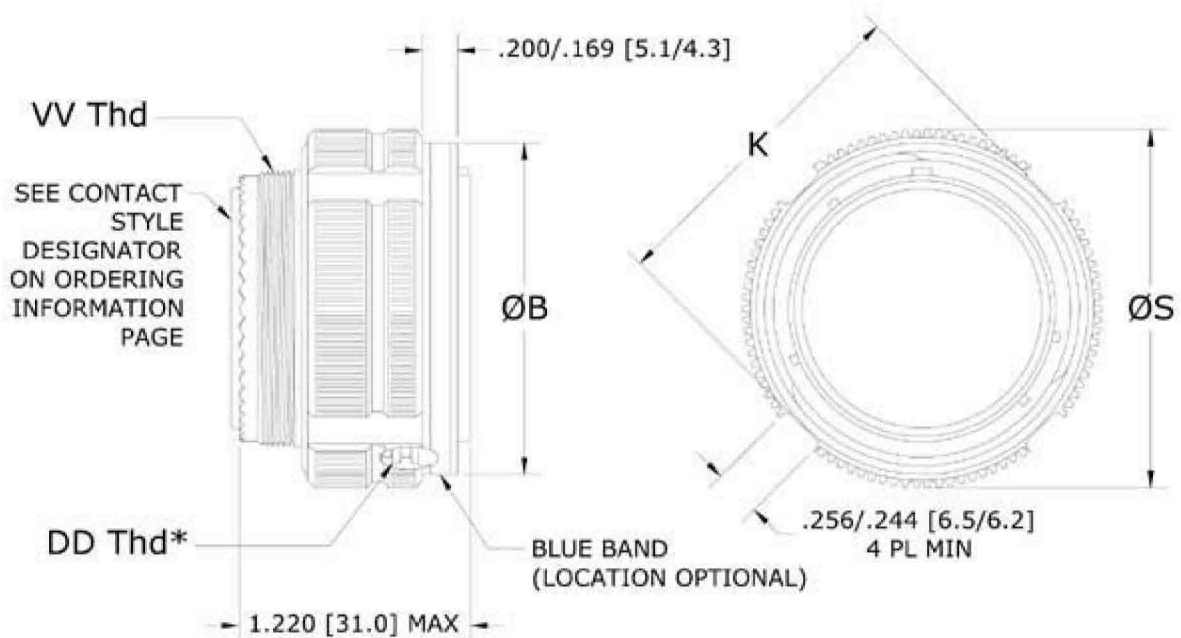

SHELL SIZE	SHELL SIZE CODE	ØB	DD Thd	K	ØS	VV Thd
		+0.008/-0.000 [+0.2/-0.0]	CLASS 2B 0.1P-0.3L-TS	MAX	MAX	-6g 0.100R
9	A	.724 [18.4]	.6250	.748 [19.0]	.858 [21.8]	M12 x 1.0
11	B	.831 [21.1]	.7500	.862 [21.9]	.984 [25.0]	M15 x 1.0
13	C	1.000 [25.4]	.8750	1.028 [26.1]	1.157 [29.4]	M18 x 1.0
15	D	1.130 [28.7]	1.0000	1.134 [29.3]	1.280 [32.5]	M22 x 1.0
17	E	1.268 [32.2]	1.1875	1.291 [32.8]	1.406 [35.7]	M25 x 1.0
19	F	1.374 [34.9]	1.2500	1.398 [35.5]	1.516 [38.5]	M28 x 1.0
21	G	1.500 [38.1]	1.3750	1.524 [38.7]	1.642 [41.7]	M31 x 1.0
23	H	1.618 [41.1]	1.5000	1.642 [41.7]	1.768 [44.9]	M34 x 1.0
25	J	1.744 [44.3]	1.6250	1.768 [44.9]	1.890 [48.0]	M37 x 1.0

\* - HIRELCO HAS INCORPORATED A PATENTED SELF-LOCKING MECHANISM INTO OUR PLUGS THAT HAVE PROVEN TO STAY LOCKED UNDER EXTREME VIBRATION

DIMENSIONS ARE IN INCHES [MILLIMETERS]